


Specificare il lato attacchi idraulici batteria


Specify the water coil connections side

- DX = Destra - Right (STANDARD)
- SX = Sinistra - Left

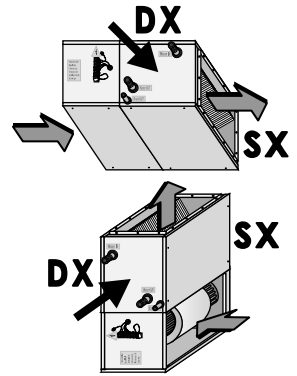

In caso di dubbi interpretativi, si ricorda che le versioni 1...36 riportate a lato sono tutte rappresentate con attacchi destri (DX).  
In case of interpretation doubts, please note that versions 1...36 shown at the side are all represented with right side connections (DX).

<b>D</b>	Zincato - Incasso Galvanized - Concealed
<b>F</b>	Zincato - A vista Galvanized - With cabinet
<b>H</b>	Preverniciato - A vista Pre-painted - With cabinet
<b>K</b>	Doppio pannello - A vista Double skin panel - With cabinet



In fase di ordine specificare sempre il Modello completo = Serie + Taglia + Batteria + Cassa portante + Versione + Lato attacchi idraulici. Esempio:  
When ordering, always specify complete Model: Series + Size + Coil + Main casing + Version + Water connections side. Example:



Risultato = Sigla Identificativa per l'ordinazione  
Result = Order Identification code

Taglia - Size	UTM	UTM 1 2R	UTM 2 2R	UTM 3 2R	UTM 4 2R	UTM 5 2R	UTM 6 2R	UTM 12 2R	UTM 13 2R	UTM 14 2R	UTM 15 2R	UTM 16 2R
Pot. Figor. totale - Total cooling cap. (1) kW		5,2	8,2	10,6	12,4	15,0	21,1	16,5	21,8	24,1	34,5	40,5
Potenza Termica - Heating capacity (2) kW		13,3	21,7	27,3	31,7	40,4	54,5	44,8	55,3	62,4	85,2	103,1
Portata aria Nom. - Nominal Air flow (3) m³/h		1.500	2.500	3.000	3.500	5.000	6.000	5.000	6.000	7.000	10.000	12.000
Numero Motori x Assorbimento elettrico Motors Number x Current input		1x 2,4A	1x 5,0A (*)	1x 5,0A (*)	1x 7,0A (*)	1x 7,2A (*)	1x 9,0A (*)	2x 5,0A (*)	2x 5,0A (*)	2x 7,0A (*)	2x 7,2A (*)	2x 9,0A (*)

(\*) Accessorio Obbligatorio: SDI.2x10A (motivo: 2 motori, o alto (>3A) assorbimento elettrico)

(\*) Compulsory Accessory: SDI.2x10A (reason: 2 motors, or high (>3A) current input)

Model	Description	Versione in Semplice pannello, autoportante, in lamiera zincata + isolamento termico-acustico interno Self-supporting single skin panel version, made of galvanized steel + internal thermal-acoustic insulation
<b>D</b>	<b>INCASSO - ZINCATA CONCEALED - GALVANIZED</b>	Versione in Semplice pannello, autoportante, in lamiera zincata + isolamento termico-acustico interno Self-supporting single skin panel version, made of galvanized steel + internal thermal-acoustic insulation
<b>F</b>	<b>A VISTA - ZINCATA WITH CABINET - GALVANIZED</b>	Versione in Semplice pannello, autoportante, in lamiera zincata + isolamento termico-acustico interno Self-supporting single skin panel version, made of galvanized steel + internal thermal-acoustic insulation
<b>H</b>	<b>A VISTA - PREVERNICIATA WITH CABINET - PRE-PAINTED</b>	Versione in Semplice pannello, autoportante, in lamiera preverniciata bianca RAL 9002 + isolamento termico-acustico interno Self-supporting single skin panel version, made of white RAL 9002 pre-painted steel + internal thermal-acoustic insulation
<b>K</b>	<b>A VISTA - DOPPIO PANNELLO WITH CABINET - DOUBLE PANEL</b>	Versione in Doppio pannello, autoportante, in Lamiera zincata / Fibra vetro / Lamiera preverniciata bianca RAL 9002 Self-supporting double skin panel version, made of Galvanized steel / Glass fibre / White RAL 9002 pre-painted steel